



SETBACK FROM STREET CURB:

All laterals must be located a minimum of three feet (3') from the back of curb.

New systems must include a rain sensor to prevent sprinkler from operating during a rain event.

SETBACK FROM SIDEWALK:

All laterals must be located a minimum of two feet (2') from the sidewalk.

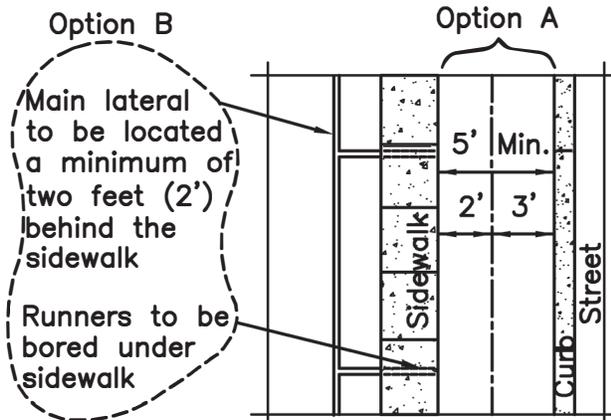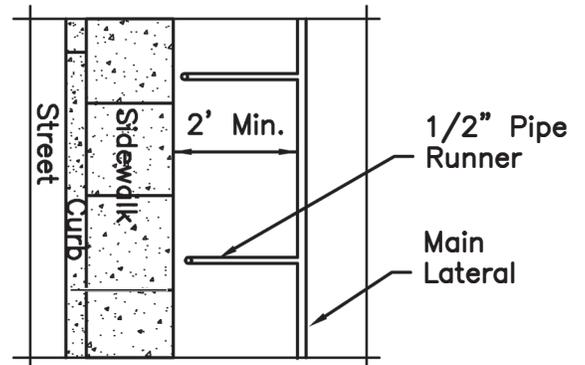

SETBACK FOR CURB/SIDEWALK COMBINATIONS WITH GREENSPACE BETWEEN:

Option A: If there is a greenspace with a minimum width of five feet (5'), the lateral(s) may be located in the greenspace, provided the lateral(s) remain at least 3' from the curb and 2' from the sidewalk.

Option B: If the greenspace is less than 5' wide, or if trees prevent the placement of the lateral in the greenspace, you must locate the lateral at least 2' behind the sidewalk on the house side.



APPROVED

JRL
CITY ADMINISTRATOR

04-25-22
DATE

REVISED

LAWN SPRINKLER

DETAIL

STANDARD
DETAIL

2950-01